



VAN-X FORD TRANSIT CUSTOM BARNDOR CURTAIN FITTING INSTRUCTIONS

Before You Begin Fitting Your Product, Please Ensure You Have Received the correct Curtain Kit(s) By Checking Your Order Invoice(s) With The Packaging Labels. Please Read These Instructions Very Carefully Before Fitting.

What is included in your Van-X Curtain Kit:

- 2 x Van-X Curtains (with 2 poppers to the outer side of each curtain)
- 2 x Van-X Flat Curtain Rails
- 2 X Van-X L-Shaped Rails
- 4 x End Caps
- 2 x Van-X Curtain Tie-Backs
- 12 x Male Poppers
- Screws (for attaching Van-X Rails)


You will need the following tools:

- Drill (using 2mm drill bit)
- Phillips Screwdriver • Tape Measure • Hacksaw.

1. Carefully unpack the curtains - Please do not use a knife or a sharp blade.
2. Measure the window frame and cut the bottom rail accordingly. The rails are slightly flexible and can be bent to fit the contour/corners of the window if required but please allow for this in your measurements. Repeat the process for the top rail.
3. Please Note: Window sizes can vary so please make where you measure for the top and the bottom rails individually.
4. **THE FLAT RAILS MUST FIT, JUST ABOVE/BELOW THE GLASS, WITHIN THE WINDOW FRAMES.**



5. Decide where you would like your screws to go and drill the holes accordingly. These holes need to be made in the widest channel of the rail. Now fix your screws into the rails and the metal frame. We recommend that you use 4-5 screws per rail. Please note: When attaching the rails to the metal frame please make sure the edge with the widest channel is facing the window.
6. FOR FORD TRANSIT CUSTOM MODELS ONLY
Please ensure the follow the image below for the locations for the rails in order to fit correctly.

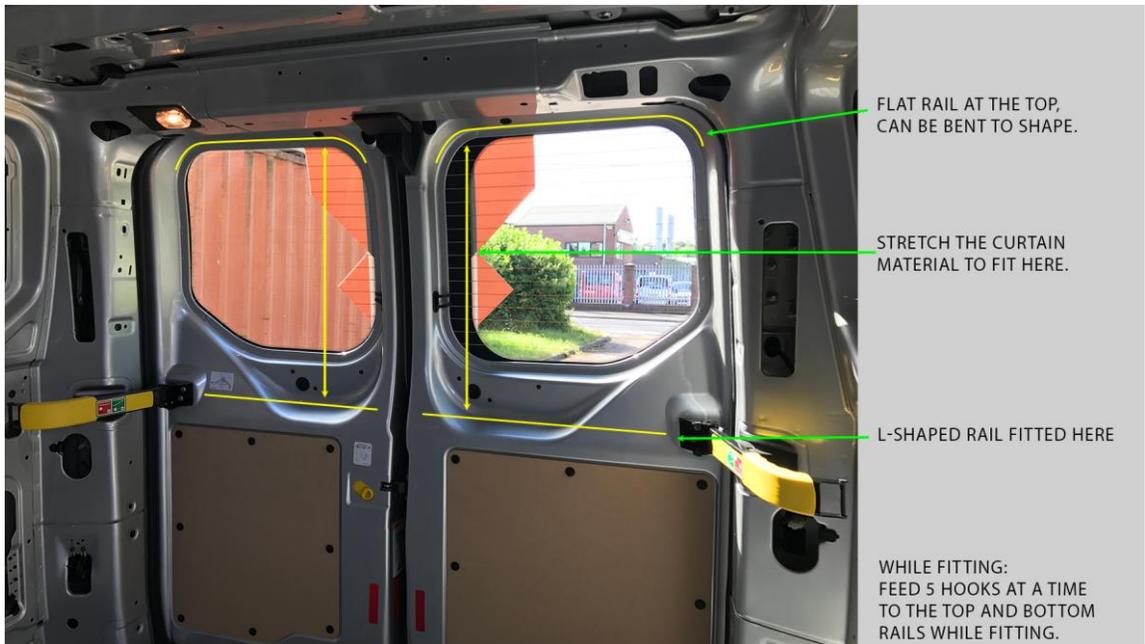



7. You are now ready to attach your curtains. We recommend that you slide 4-5 hooks along your top rail making sure that the poppers are on the outer side of the material. You may want to attach one end cap to each rail at this point to stop the curtain sliding out.
8. Gently stretch the curtain and fit the 4 or 5 opposite hooks to the bottom rail. It is easier if you have someone to help you by holding the top end of the curtain in place (These Van-X curtains are designed to stretch)
9. Continue the process Until all the hooks are fitted and then fit the second curtain through the rails exactly the same method but make sure the second curtain has the poppers facing the opposite side of the window.
10. At this point, make sure that YOU have fitted all of the end caps to the rails.
11. Now that the curtains are fitted, look at the end of the curtain with the poppers facing the outer edge as these need to be attached to the side of the window frame. To fit the 4 male poppers, please fix where necessary with a rivet or the last remaining 4 screws included in this kit. (Please view the image below for an example how the male poppers on the window frame align UP with the female poppers off the curtains.)
12. There are 2 tie-backs supplied within the kit, these are used to attach around the curtains so they stay in place on their own.

Your new Van-X Curtains are now ready!

If You Still Have Problems/Difficulties Fitting Your Bonnet Bra, Please Contact Us:

Telephone: 01782 280 888 | **E-Mail:** info@van-x.co.uk | **Website:** www.van-x.co.uk |
WhatsApp: 01782 454 897